

# Startup guide for the Euroscope simulator using Sweatbox


This guide is written as a quick-reference for ATC-mentors using the Euroscope simulator and the Sweatbox server for ATC training.

In this example, the mentor is logging in as EKCH\_M\_TWR, and the student is training on EKCH\_TWR.


Feedback on this document: [accsca2@vatsim-scandinavia.org](mailto:accsca2@vatsim-scandinavia.org)

## Mentors checklist

1. Start Euroscope as you use to with your usual profile- and sector-files loaded
2. Click "CONNECT" - opens the Connect dialog
3. Selection connection mode: select "Start Sweatbox simulator session"
4. Callsign: the callsign, that the mentor is supposed to use during the training, in this example: EKCH\_M\_TWR (could also be e.g. EKCH\_APP)
5. Server: "SweatBox"
6. If you already have downloaded the scenariofile to be used, select the file with the Browse button next to the Scenario-field. Otherwise, click "Download", search for the files needed, e.g. by entering EKCH in the "Search for scenario" field and click "Search", select the scenario to be used, click Download, select a location for the file, and finally click ok. Now your connect dialog should look something like this (besides the obvious as Real name etc.):

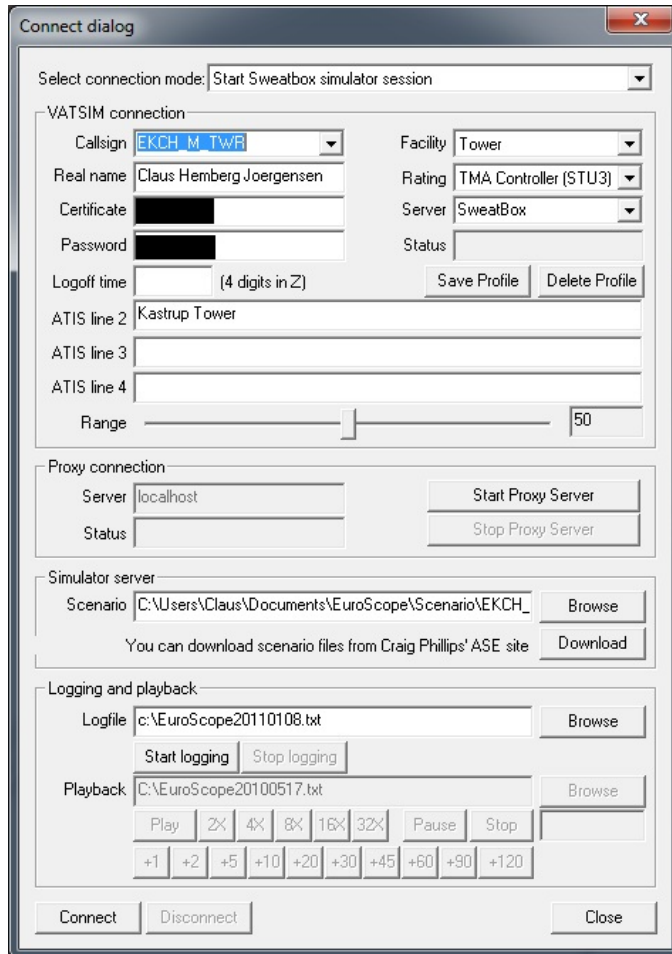


7. Click "Connect" - and the simulator training dialog opens
8. Click the headset icon, and remove all checkmarks on the line for your position (in this case, EKCH\_M\_TWR). This step is rather important, otherwise you will connect to the voice channel to be used when logged on to a VATSIM-server.
9. Select the line for your students position and click "New". Change the channel name to a name that is not used on VATSIM, e.g. training\_ekch\_twr, and click "Modify". Your communication dialog should now look something like this (notice the important change with a new channel name):

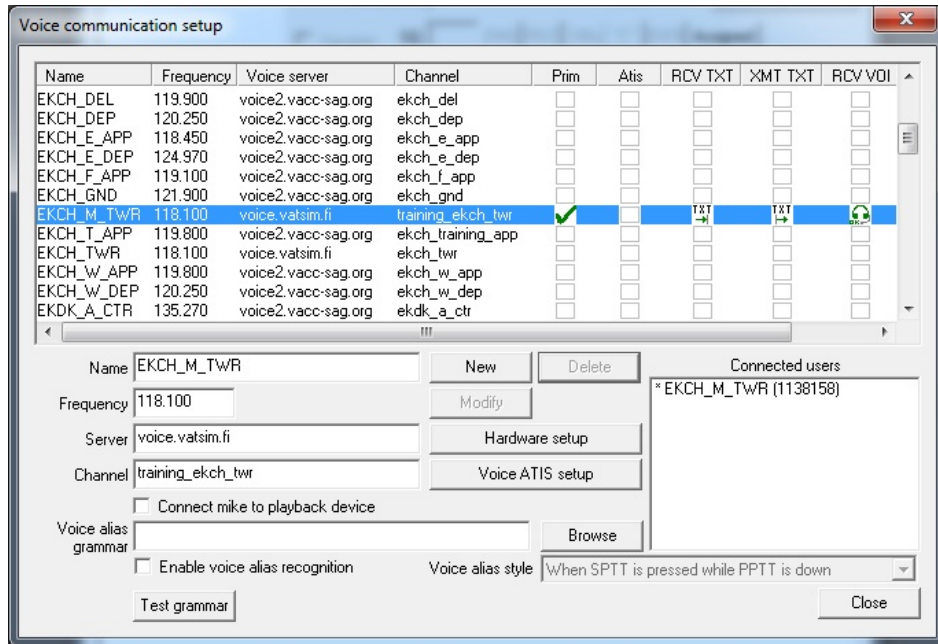


10. Click in all checkboxes beside the new line, except the “Atis” column. Now you should be able to transmit and receive voice on the new training-channel.
11. Close the “Voice communication setup” window.
12. Click “Resume” and the simulator scenario will start

## Students checklist

1. Start Euroscope as you use to with your usual profile- and sector-files loaded
2. Click “CONNECT” - opens the Connect dialog
3. Selection connection mode: select “Direct to VATSIM”
4. Callsign: the callsign, to be used by the student, in this example: EKCH\_TWR
5. Server: “SweatBox”. Now your connect dialog should look something like this (besides the obvious as Real name etc.):

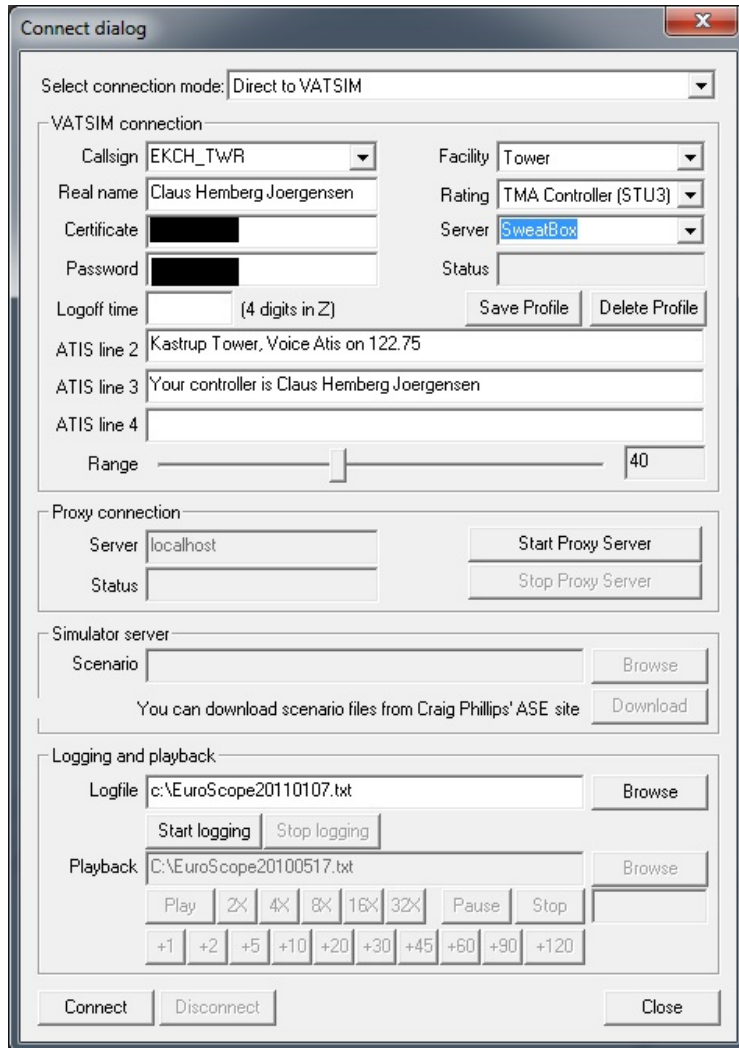

6. Click "Connect"
7. Click the headset icon, and remove all checkmarks on the line for your position (in this case, EKCH\_TWR). This step is rather important, otherwise you will connect to the voice channel to be used when logged on to a VATSIM-server.
8. Select the line for your position and click "New". Change the channel name to the same channel name, that your mentor has used in step 10 in the Mentors checklist (e.g. training\_ekch\_twr), and click "Modify".
9. Click in all checkboxes beside the new line, except the "Atis" column. Now you should be able to transmit and receive voice on the new training-channel. Your communication dialog should now look something like this (notice that in the list "Connected users" you should be able to see that your mentor is connected too):

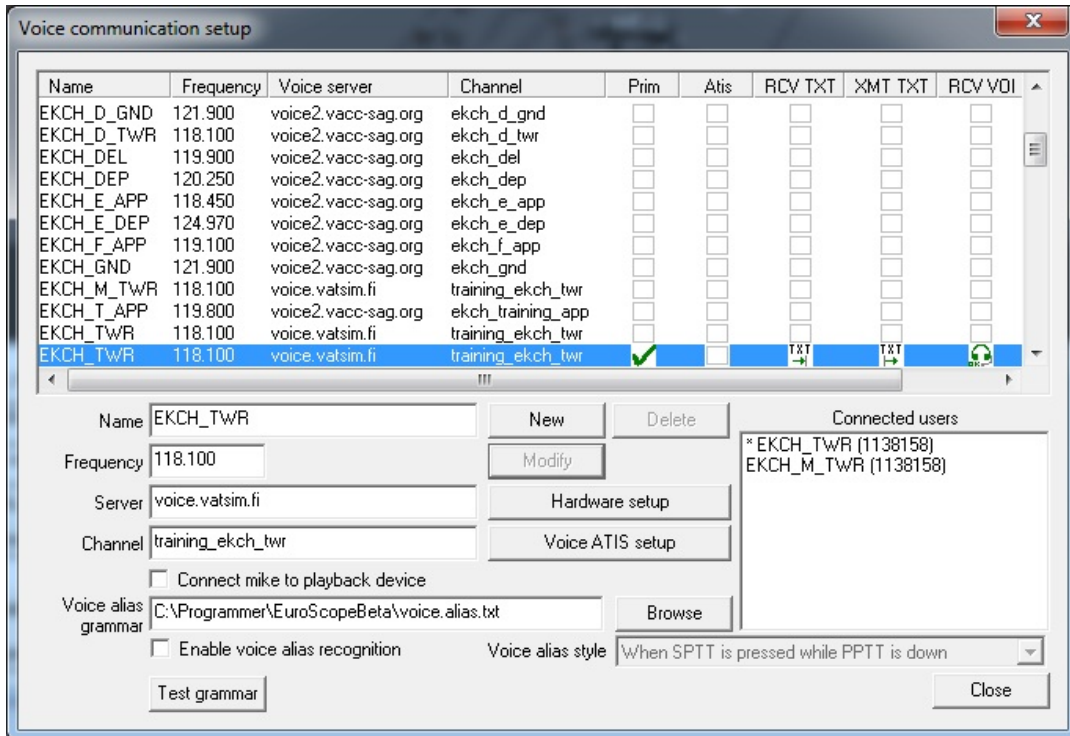

10. Close the "Voice communication setup" window.